


## 8-Port Video Switch

With eight VGA/Audio input ports, the VS0801 8-port Video Switch allows you to conveniently display the video output of eight separate computer systems on any monitor or multimedia projector. Rack mountable in only 1U of space, and with full audio support, the VS0801 is perfect for server room applications that require the monitoring of high quality video and audio output.

Designed for enterprise use, the VS0801 eliminates the extra cost of purchasing a separate monitor for each computer system, saves space and power in the server room, and provides high speed audio and video for a wide range of industrial and commercial applications.

### Setup

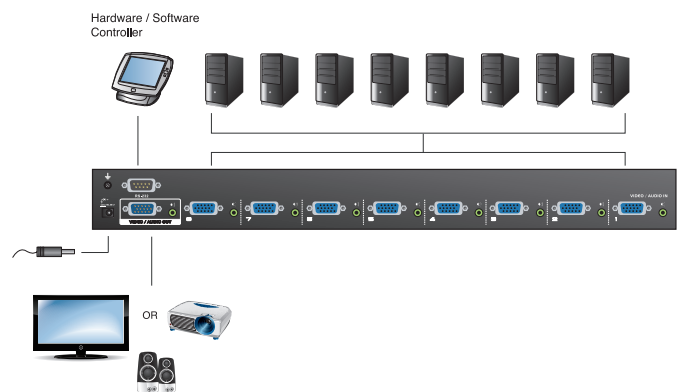

### Features

- Displays the video output of up to eight computers on a single display
- Quick and easy switching between VGA/Audio sources via front panel pushbuttons or IR remote control
- Supports stereo audio
- Built-in bi-directional RS-232 serial port for high-end system control
- Supports up to 300 MHz bandwidth
- Superior video quality – 2048x1536@60Hz; DDC; DDC2; DDC2B
- Supports all analog displays – VGA, SVGA, UXGA, WUXGA, and multisync
- Plug-and-play – no software installation required
- All-metal casing provides durability and protection
- Rack Mountable (1U size)

### Specifications

Function		VS0801	
Display Connections		1	
Connectors	Device	Video In	8 x HDB-15 Male (Blue)
		Audio In	8 x Mini Stereo Jack Female (Green)
	Display	Video Out	1 x HDB-15 Female (Blue)
		Audio Out	1 x Mini Stereo Jack Female (Green)
	RS-232 Port	1 x DB-9 Female (Black)	
Power	1 x DC Jack		
LEDs	Selected	8 (Green)	
Video		2048 x 1536@60 Hz; DDC2B	
Power Consumption		DC5.3V, 1.01W	
Environment	Operating Temp.	0–50°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	2.10 kg	
	Dimensions (L x W x H)	43.20 x 15.40 x 4.40 cm	

\* Product specifications and appearance are subject to change without notice.